


SY80U PERFORMANCE DE LEVAGE

Standard 3499 mm (11' 6") Flèche
Standard 2051 mm (6' 9") Bras
Standard 450 mm (18") Patin de chenille sans godet

Les classements sont basés sur ISO10567: 2007. La capacité de levage ne dépasse pas 75% de la charge debasculement avec la machine sur le sol, le sol plat ou 87% de la capacité de levage hydraulique.


AVANT


CÔTÉ

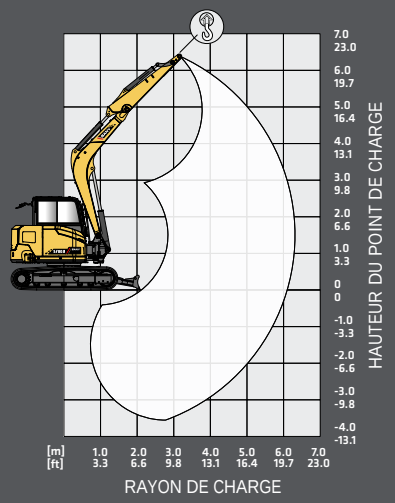

LAME BAISSÉE

RAYON DE CHARGE	2.0 m 6.6 ft		3.0 m 9.8 ft		4.0 m 13.1 ft		5.0 m 16.4 ft		PORTÉE MAX.	
HAUTEUR POINT DE CHARGE										
5.0 m 16.4 ft					1960 kg* 4,321 lb*	1960 kg* 4,321 lb*	1800 kg* 3,968 lb*	1338 kg 2,950 lb	1710 kg* 3,770 lb*	1325 kg 2,921 lb
4.0 m 13.1 ft					2080 kg* 4,586 lb*	2080 kg* 4,586 lb*	2085 kg* 4,597 lb*	1345 kg 2,965 lb	1225 kg* 2,701 lb*	1055 kg 2,326 lb
3.0 m 9.8 ft			3100 kg* 6,834 lb*	3100 kg* 6,834 lb*	2540 kg* 5,600 lb*	1875 kg 4,134 lb	2275 kg* 5,016 lb*	1315 kg 2,899 lb	1585 kg* 3,494 lb*	930 kg 2,050 lb
2.0 m 6.6 ft			4745 kg* 10,461 lb*	2675 kg 5,897 lb	3180 kg* 7,011 lb*	1760 kg 3,880 lb	2570 kg* 5,666 lb*	1260 kg 2,778 lb	1630 kg* 3,594 lb*	865 kg 1,907 lb
1.0 m 3.3 ft			4325 kg* 9,535 lb*	2450 kg 5,401 lb	3745 kg* 8,256 lb*	1650 kg 3,638 lb	2845 kg* 6,272 lb*	1205 kg 2,657 lb	1750 kg* 3,858 lb*	855 kg 1,885 lb
0.0 m 0.0 ft			4850 kg* 10,692 lb*	2390 kg 5,269 lb	4020 kg* 8,863 lb*	1590 kg 3,505 lb	2995 kg* 6,603 lb*	1170 kg 2,579 lb	1965 kg* 4,332 lb*	885 kg 1,951 lb
-1.0 m -3.3 ft	3845 kg* 8,477 lb*	3845 kg* 8,477 lb*	5670 kg* 12,500 lb*	2360 kg 5,203 lb	3950 kg* 8,708 lb*	1550 kg 3,417 lb	2935 kg* 6,471 lb*	1140 kg 2,513 lb	2370 kg* 5,225 lb*	995 kg 2,194 lb
-2.0 m -6.6 ft	6120 kg* 13,492 lb*	4830 kg 10,648 lb	4915 kg* 10,836 lb*	2375 kg 5,236 lb	3490 kg* 7,694 lb*	1550 kg 3,417 lb	2445 kg* 5,390 lb*	1150 kg 2,535 lb	2400 kg* 5,291 lb*	1185 kg 2,612 lb
-3.0 m -9.8 ft	5055 kg* 11,144 lb*	5055 kg* 11,144 lb*	3385 kg* 7,463 lb*	2450 kg 5,401 lb					2290 kg* 5,049 lb*	1735 kg 3,825 lb

LAME LEVÉE

5.0 m 15.4 ft					1960 kg* 4,321 lb*	1960 kg* 4,321 lb*	1800 kg* 3,968 lb*	1338 kg 2,950 lb	1710 kg 3,770 lb	1325 kg 2,921 lb
4.0 m 13.1 ft					2080 kg* 4,586 lb*	2080 kg* 4,586 lb*	2085 kg* 4,597 lb*	1345 kg 2,965 lb	1225 kg* 2,701 lb*	1055 kg 2,362 lb
3.0 m 9.8 ft			3100 kg* 6,834 lb*	3100 kg* 6,834 lb*	2540 kg* 5,600 lb*	1875 kg 4,134 lb	1770 kg 3,902 lb	1315 kg 2,899 lb	1285 kg 2,833 lb	930 kg 2,050 lb
2.0 m 6.6 ft			3850 kg 8,488 lb	2675 kg 5,897 lb	2425 kg 5,346 lb	1760 kg 3,880 lb	1715 kg 3,781 lb	1260 kg 2,778 lb	1185 kg 2,612 lb	865 kg 1,907 lb
1.0 m 3.3 ft			3595 kg 7,926 lb	2450 kg 5,401 lb	2305 kg 5,082 lb	1650 kg 3,638 lb	1655 kg 3,649 lb	1205 kg 2,657 lb	1170 kg 2,579 lb	855 kg 1,885 lb
0.0 m 0.0 ft			3525 kg 7,771 lb	2390 kg 5,269 lb	2240 kg 4,938 lb	1590 kg 3,505 lb	1615 kg 3,560 lb	1170 kg 2,579 lb	1215 kg 2,679 lb	885 kg 1,951 lb
-1.0 m -3.3 ft	3845 kg* 8,477 lb*	3845 kg* 8,477 lb*	3490 kg 7,694 lb	2360 kg 5,203 lb	2195 kg 4,839 lb	1550 kg 3,417 lb	1585 kg 3,494 lb	1140 kg 2,513 lb	1360 kg 2,998 lb	995 kg 2,194 lb
-2.0 m -6.6 ft	6120 kg* 13,492 lb*	4830 kg 10,648 lb	3510 kg 7,738 lb	2375 kg 5,236 lb	2195 kg 4,839 lb	1550 kg 3,417 lb	1600 kg 3,527 lb	1150 kg 2,535 lb	1630 kg 3,594 lb	1185 kg 2,612 lb
-3.0 m -9.8 ft	5055 kg* 11,144 lb*	5055 kg* 11,144 lb*	3385 kg* 7,463 lb*	2450 kg 5,401 lb					2290 kg* 5,049 lb*	1735 kg 3,825 lb

*Indicates load limited by hydraulic lifting capacity
In the interest of continual equipment development, SANY America, Inc. reserves the right to change these specifications at any time without prior notification.

SANY America, Inc. 318 Cooper Circle, Peachtree City, Georgia 30269
470.552.SANY **sanyamerica.com**

©2020 SANY America, Inc. HEXPS2080U001